

Coupling 4" Clay x 4" Cast Iron, Plastic, Steel, Copper and Lead Shielded.

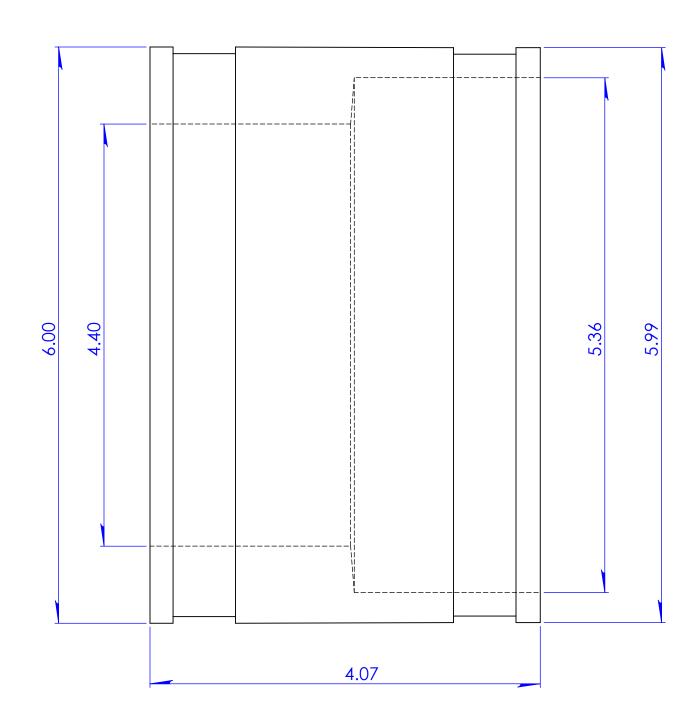

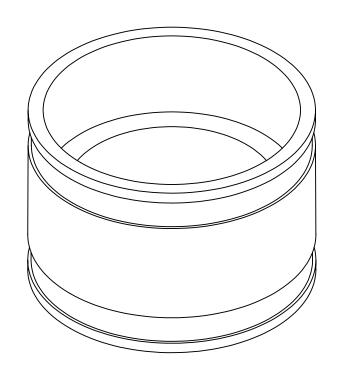

D. Brady

DATE:

10/26/2011

SCALE:

not to scale

SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERNCO, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FERNCO, INC. IS PROHIBITED.

TOLERANCES:
.X= Fractional±
.XX= ±.06
ANG.= ±3°
UNLESS OTHERWISE SPECIFIED

	5 134 . 11	0.50 !!	–	/OILL		0175	DEGLOVIED
	Part Weight	2.50 lbs.	Installation Torque	60" Lbs.	UNITS:	SIZE:	DESIGNER:
	Min/Max Temp.	-30/140 Degrees F	Conforms to ASTM	D5926, C1173	INCHES	A	
	Pressure Tested	4.3 PSI	Clamps used	300 SeriesStainless	3RD ANGLE PROJECTION		OUEOVED.
	Material	Flexible PVC 60 Duro Shore A	Box Quantity	12	DO NOT SCALE DRAWING		CHECKER: