



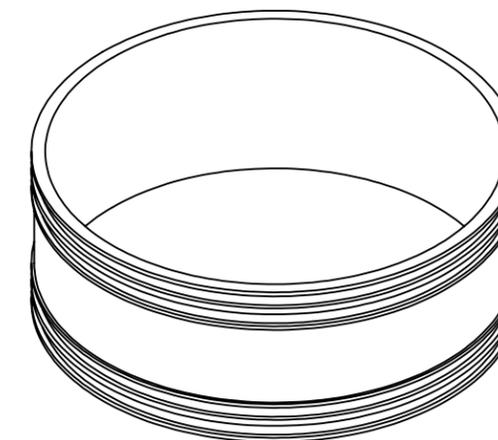

300 S. DAYTON ST.
 DAVISON, MI 48423
 PH: 810-653-9626
 FAX: 810-654-2616

1056-2424RC

DESCRIPTION:
 Coupling 24" Cast Iron, Plastic, Steel x 24" Cast Iron,
 Plastic, Steel

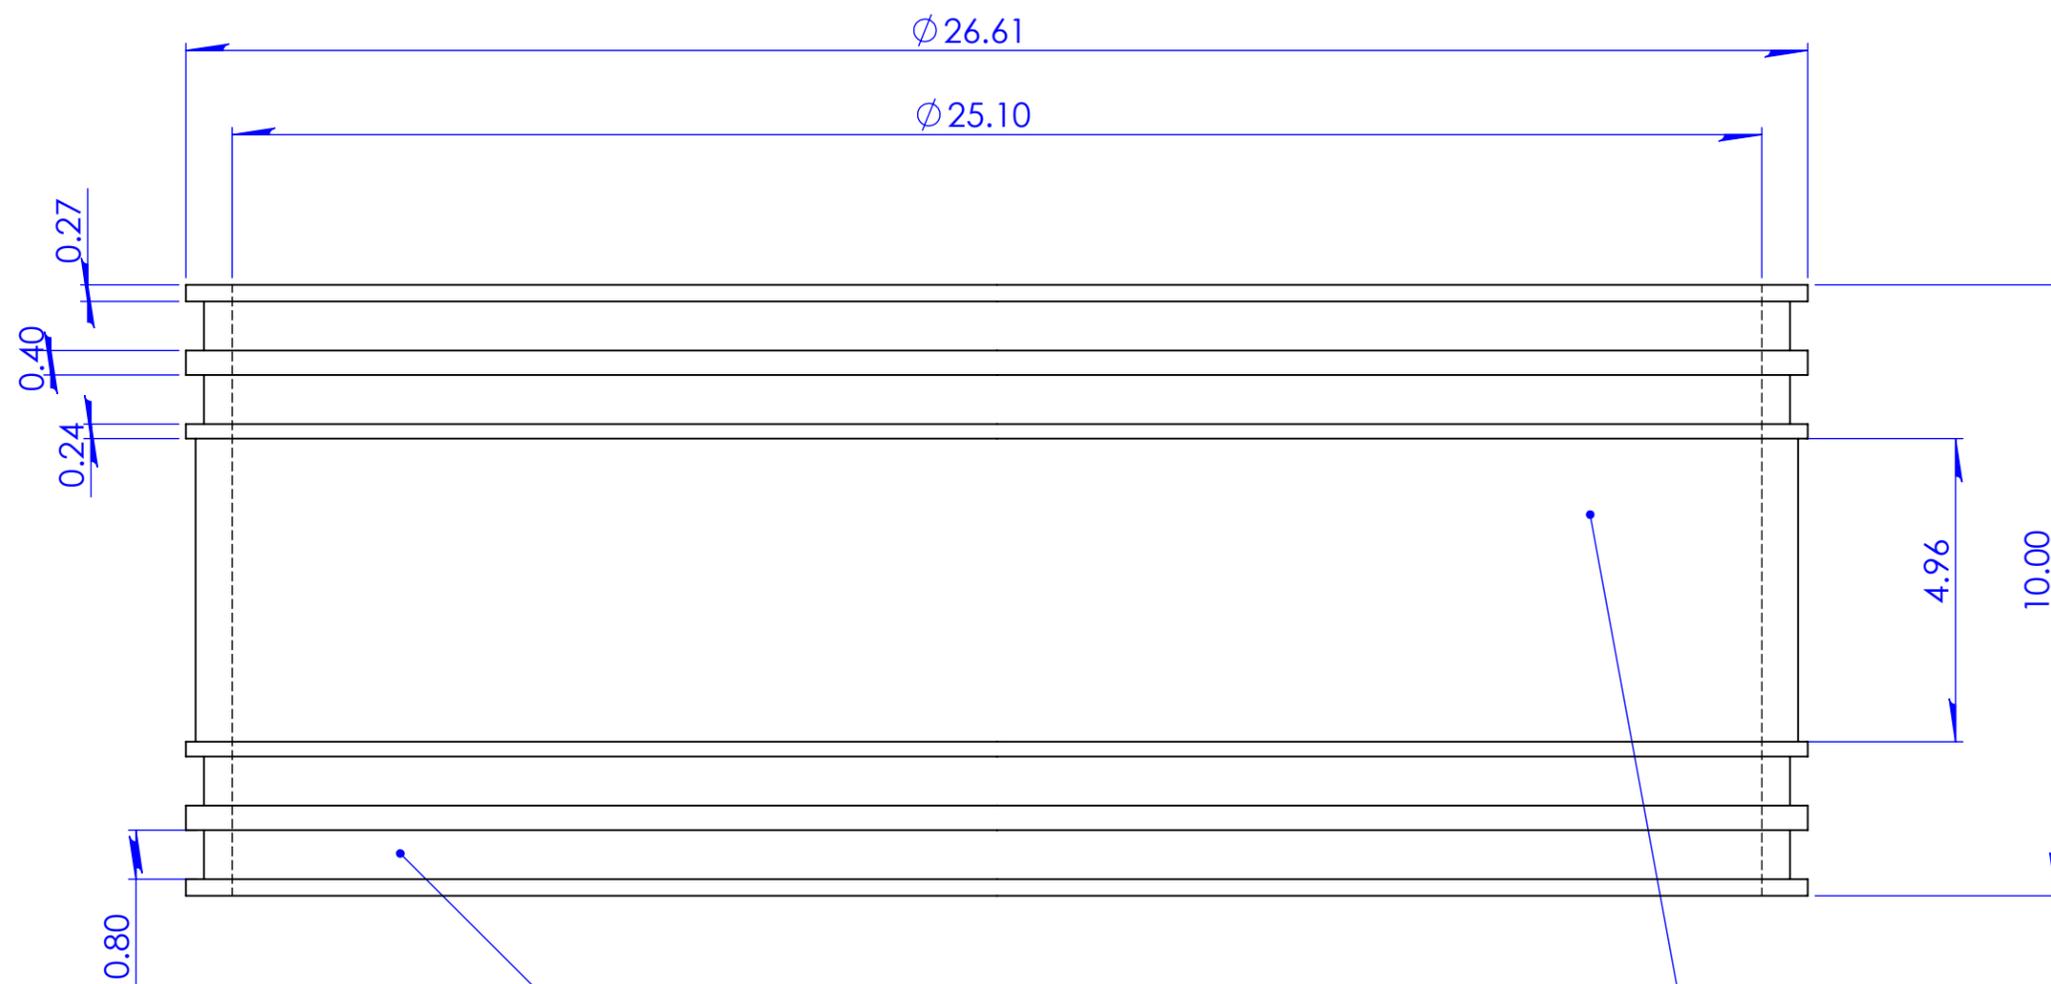

Equipped with (4) 300SS High Torque Clamps
 120 in-lb Installation Torque

SRC-84; 84"x5"x.012 Shield 300SS, Equipped with (2) 300SS Clamps
 60 in lbs Installation Torque

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 FERNCO, INC. ANY REPRODUCTION IN
 PART OR AS A WHOLE WITHOUT THE
 WRITTEN PERMISSION OF FERNCO, INC.
 IS PROHIBITED.

TOLERANCES:
 .X= Fractional ±
 .XX= ±.06
 ANG.= +3°
 UNLESS OTHERWISE SPECIFIED

Part Weight	18.90 lbs.	Installation Torque	120 in lbs
Min/Max Temp.	-30/140 Degrees F	Conforms to ASTM	D5926, C1173
Pressure Tested		Clamps used	300 SS Series
Material	Flexible PVC 60 Duro Shore A	Box Quantity	

UNITS:	SIZE:	DESIGNER:	SCALE:
INCHES	A	N. Goddard	not to scale
3RD ANGLE PROJECTION	CHECKER:	DATE:	SHEET 1 OF 1
DO NOT SCALE DRAWING		1/7/2016	