


Fix-A-Flange®

For Repair of Broken Water Closet Flanges

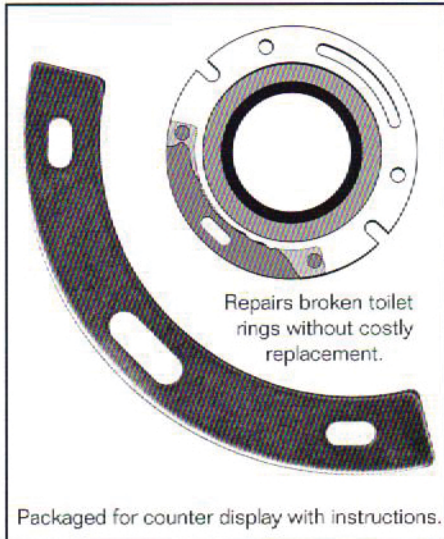

Installation Instructions

1. Shut off water to toilet. Flush toilet until tank is empty.
2. Disconnect water supply tube to toilet.
3. Unbolt toilet, remove from floor and set aside.
4. Insert bolt through hole in Fix-A-Flange.
5. Slide Fix-A-Flange under broken portion of ring.
6. Replace wax sealing ring under toilet. Connect toilet bowl and reverse steps 1, 2, & 3 above.

FIX-A-FLANGE

eliminate the need to replace broken closet flanges, saving time and money. Simply place the flange under the broken area of the ring and tighten the nut.

Suitable for use with cast iron, plastic, copper and brass closet flanges.

Part No. SF-100

